


# 9-STEP HIGH FREQUENCY BATTERY CHARGER 6/12V

WET MF EFB AGM GEL

Type: **Topcore 4A**

Barcode: 8436594880834

This is a **smart battery charger with dual voltage and dual current** for small to medium size applications. After connection, charge is performed automatically until completion, then the **maintenance** mode initiates and keeps the battery in a full state of charge until disconnection, without any wearing. To operate safely, ensure you respect all safety instructions and personal precautions described in the product manual.

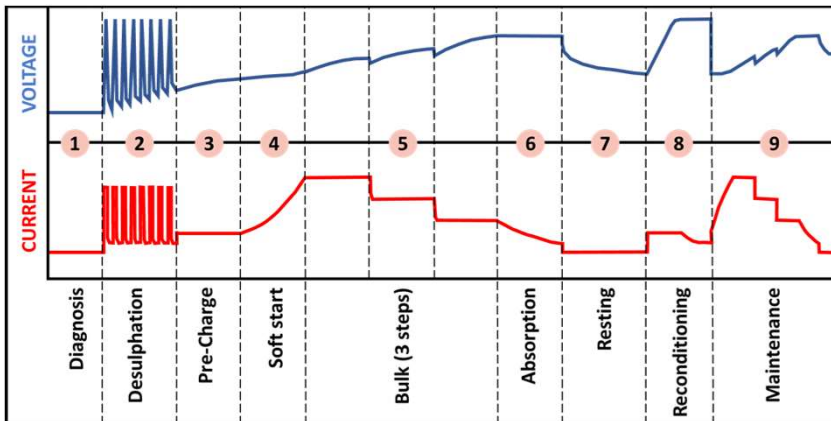

**Functions:**

- Diagnosis
- Deep discharge recovery
- Cold weather mode
- Maintenance charge

**Safety protections:**

- Reverse polarity/short circuit
- Overheating

**Box content:**

- Charger with cables (AC mains plug and battery clamps)
- User manual

**Other Topcore chargers:**

- Topcore 1A-12V
- Topcore 8A-6/12V
- Topcore 15A-12/24V
- Topcore 30A-12/24V



**Technical Specifications**

|               |  |
|---------------|--|
| Input:        | 220-240V, 50-60Hz, 0,6A  |
| Output:       | 6V-2A or 12V-2/4A  |
| Technologies: | Lead-acid batteries: WET, MF, EFB, AGM & GEL   |
| Applications: | 6V-2A mode: 6V batteries within 10-60Ah<br>12V-2A mode: 12V batteries within 10-60Ah<br>12V-4A mode: 12V batteries within 40-120Ah |